

FROM THE INVENTOR

S/SX SERIES


Heavy duty steel cable carriers for extreme applications



Inner height
31 - 578 mm



Inner width
35 - 1500 mm



B_i increment
1 mm



Pitch
65 - 550 mm



Bending radius
75 - 2400 mm



Travel length
up to 24.9 m



Travel speed
up to 2.5 m/s




Travel acceleration
up to 5 m/s²



Siteband design
Sandwich design
(consisting of two plates)



Additional load
up to 800 kg/m

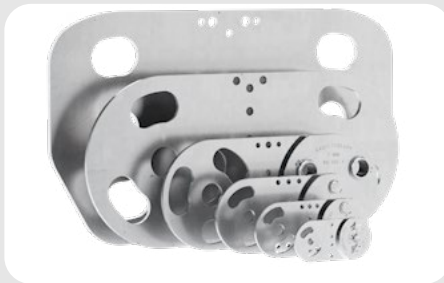

11 types in different sizes and a large selection of stay systems



Glide shoes available for gliding applications



Stroke system with hardened bolt and circlips



Also available as covered variants with cover system or steel band cover

CUT COSTS WITH TOTALTRAX® COMPLETE CABLE CARRIER SYSTEMS

Use our know-how. Working closely with you, our experienced system specialists can provide pre-sales support, including planning and design services through post sales service and support.

Everything from a single source

- » Consulting
- » Planning
- » Design
- » Cable carriers
- » Power & control cables
- » Hydraulic hoses
- » Pneumatic hoses
- » Plug-and-socket connectors
- » Assembly plates
- » Complete assembly of all components
- » Complete warranty

